



367.41079X00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: B. DAVIDSON, et al

Serial No.: 10/043,334

Filing Date: January 14, 2002

For: PORTABLE TELEPHONE

Attention: Box Missing Parts

*5/ Priority
Paper
1-5 Sept 02
6-16-02*

LETTER CLAIMING RIGHT OF PRIORITY

Assistant Commissioner
for Patents
Washington, D.C. 20231

April 15, 2002

Sir:

Under the provisions of 35 USC 119 and 37 CFR 1.55, applicants hereby claim the right
of priority based on:

**Great Britain Application No. 0101573.4
Filed: January 22, 2001**

A Certified copy of said application document is attached hereto.

Respectfully submitted,

Donald E. Stout
Registration No. 26,422
ANTONELLI, TERRY, STOUT & KRAUS, LLP

DES/CIB/jdc
Enclosures
703/312-6600



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed




Dated 21 January 2002

22 JAN 2001

The
Patent
Office

23JAN01-E599894-1 D02716
P01/7768 0.00-0101573.4

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

PAT 0 1002 GB

2. Patent application number

(The Patent Office will fill in this part)

0101573.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NOKIA MOBILE PHONES LIMITED
KEILALAHDENTIE 4
02150 ESPOO
FINLAND

Patents ADP number (if you know it)

5911995004

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

4. Title of the invention

PORTABLE TELEPHONE

5. Name of your agent (if you have one)

NOKIA IPR DEPARTMENT
NOKIA HOUSE
SUMMIT AVENUE
FARNBOROUGH
HAMPSHIRE
GU14ONG UK

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it)

7577638001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an

BEST AVAILABLE COPY

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description 7

Claim(s) 2

Abstract 1

Drawing(s) 4

10. If you are also filing any of the following,
state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right
to grant of a patent (Patents Form 7/77)

Request for preliminary examination
and search (Patents Form 9/77) 1

Request for substantive examination
(Patents Form 10/77)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

JULIET HIBBERT

Date

21.12.00

12. Name and daytime telephone number of
person to contact in the United Kingdom

EAN DAVIES 01252 865390

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

PORTABLE TELEPHONE

PAT 01002 GB

This invention relates to a two-part mobile telephone configured to be worn about the person, particularly in the manner of a wristwatch.

5

Portable telephones have become ever smaller and lighter since portable telephones first became widely available for use by the general public. Current portable telephones are very compact and lightweight, and manufacturers are keen to develop telephones which are considered personal accessories, to be carried or worn about the person, rather than separate articles which can be more easily misplaced.

10

Part of the inspiration for the present invention came from the realisation that people are generally accustomed to wearing a watch, and do not generally object to wearing one all day, every day. Indeed, many watches, particularly of the diving or chronograph type, can weigh considerably more than many of the more recent portable telephones. For instance, the Nokia® 8890 telephone weighs 91g and has a volume of 70cc, whereas a typical sports or diving watch can weigh well over 100g. The weight of such watches is often regarded as a sign of quality.

15

20

A wrist-mounted portable telephone is disclosed in co-assigned patent GB2317300B. In this case, a telephone element 5 is arranged to be detached from a wrist band 2, allowing the user to use the detachable element in the same manner as a regular telephone.

25

The removable telephone part 5 has a flexible element 6 which conforms to the shape of the strap when mounted, but which adopts a straighter configuration in use (as shown by the dotted lines).

30

BEST AVAILABLE COPY

The antenna of the telephone is disposed within the flexible portion 6. This position for the antenna can cause problems. The flexible part 6 of the telephone also houses the earpiece, and due to the flexible nature of the housing, the user of the telephone may be tempted to hold the telephone by the flexible part so as to position the telephone more firmly against his ear. By doing so he may well shield the antenna with his hand, and so adversely affect its performance.

According to the present invention, there is provided a portable telephone assembly comprising first and second portions arranged to be mutually detachably interconnectable, the second portion being further arranged to be removably attachable to a user, the first portion comprising: a body portion; and an extendible portion movable between a relatively extended configuration and a relatively contracted configuration, wherein the extendible portion is biased towards the relatively extended configuration, such that when the first portion is detached from the second portion, the extendible portion is urged towards the relatively extended configuration.

For a better understanding of the present invention, and to understand how the same may be brought into effect, the invention will now be described, by way of example only, with reference to the appended drawings in which:

Figure 1 shows a prior art wrist-mounted telephone;

Figure 2 shows an exploded view of a telephone apparatus according to an embodiment of the present invention;

Figure 3a shows the telephone portion of the apparatus of Figure 2 in a relatively contracted configuration;

Figure 3b shows the telephone portion of the apparatus of Figure 2 in a relatively extended configuration; and

BEST AVAILABLE COPY

Figures 4a-c show the steps in the attachment of the telephone portion to the bracelet portion according to an embodiment of the invention.

5 Figure 2 shows an exploded view of a wrist-mounted telephone apparatus 100 according to an embodiment of the invention. The telephone apparatus 100 comprises two parts: a detachable telephone part 200, and a strap or bracelet-like part 300 for attachment to a user's wrist.

10 The telephone part 200 is shown separate from the strap part 300 for clarity. In reality, in the mounted configuration shown, it would be located flush against the strap 300. The telephone part 200 comprises all the circuitry and elements normally associated with a portable radio telephone, as would be known by the skilled man. The telephone part comprises three major portions: an upper portion 210, a central portion 240 and a lower portion 270.

15 The profile of the telephone part 200 is generally curved, to provide a good fit with the bracelet part 300, which remains attached to the wrist when the telephone is in use.

20 The bracelet part provides a convenient means by which the telephone may be carried about the user's person. The bracelet may also provide additional functionality in the manner of an additional power supply for the telephone.

25 The bracelet part may be attached to the user's wrist by any conventional technique such as a buckle arrangement, or an elasticated strap.

30 However, there is no necessity for the telephone part to be curved as shown. Depending on the dimensions of the telephone part, it could be arranged to have a substantially flat profile. The profile chosen is matched by the attachment means of the bracelet part 300 so that reliable attachment and removal can be achieved.

A microphone element is positioned in the lower portion 270. A battery (not shown) is positioned in the lower portion also. An earpiece and antenna are positioned in the upper portion 210. The central portion 240 accommodates the bulk of the circuitry of the telephone, including a display 250, and a number of user-operable input keys 260. The keys are for controlling the operation of the telephone, and are disposed on the front surface, as well as along one or more edges of the telephone 200.

When not in use, the telephone part 200 attaches firmly to the strap part 300. In order to use the telephone, the user must operate the release mechanism to free the telephone from the strap. The release mechanism can take many forms, and its exact operation is not critical to the operation of the invention.

For instance, a release mechanism similar to that described in the aforementioned prior art document GB2317300B could be used. The mechanism therein described comprises two user-operable release latches which are situated on opposing edges of the telephone. The latches are arranged to engage with complementary parts on the bracelet and so lock the telephone to the bracelet. To remove the telephone part, the user simply squeezes the two latches, which unlocks the telephone and allows it to be removed from the bracelet. To re-attach the telephone, the user simply needs to snap the telephone back into position, and so re-engage the latches.

Alternative arrangements are possible, and will depend on the exact design chosen for the apparatus. For instance, some form of press-stud or snap-fit arrangement can be used.

When the release mechanism has been operated, and the telephone is separated from the strap, the upper portion 210 of the telephone, containing the loudspeaker and the earpiece, is urged away from the central portion 240. The upper portion 210 is biased through the use of a spring, or similar resilient part, to adopt a position in which it is propelled away from the central portion.

This situation can be seen in Figures 3a and 3b which shows the telephone part 200 in its relatively contracted and extended positions, respectively. In normal operation, the telephone part 200 would assume the relatively contracted position when attached to the bracelet 300.

5

The configuration of the telephone part 200 as shown in Figure 3b, with the upper portion in an extended position, is the natural configuration adopted by the telephone 200 when not attached to the bracelet 300. To maintain the telephone in the contracted configuration of Figure 3a requires the application
10 of a constraining force. The constraining force is provided by interaction with the bracelet 300 when the telephone is attached to the bracelet.

Upon removal from the strap, the internally located spring part propels the upper portion of the telephone 210 towards its relatively extended position.
15 The upper portion 210 is supported by a pair of elongated supporting members 280. The supporting members 280 are formed as hollow tubular elements. This allows the electrical connections to the antenna and the earpiece to be routed separately through respective supporting members. This mitigates potential interference between the signals carried to and from
20 the two separate elements.

It is, of course, possible to route both sets of connections down a common channel, if a design having a single supporting member were adopted.

25 The action of the upper portion 210 adopting the extended position places the telephone in a configuration ready for use: the antenna and earpiece, which reside in the upper portion 210, are now situated away from the main body of the telephone. The earpiece is thus moved further away from the microphone, and assists in achieving a better audio performance. It also feels more natural
30 to the user for the distance between earpiece and microphone to more closely resemble the actual distance between his ear and mouth.

In the extended position, the user is encouraged to hold the telephone by the central portion 240, or possibly by the supporting members 280. This ensures that his hand is kept away from the antenna, located in upper portion 210. In this way, the signals transmitted and received by the antenna experience
5 minimal disturbance from interaction with the user's hand.

The exact type of antenna used is not critical to the invention, but a suitable compact antenna is the plate or PIFA antenna.

10 The telephone can detect its attachment status by sensing the relative position of the upper portion 210. In this way, it can use the sensed attachment status as a means of controlling certain functionality of the telephone.

15 For instance, if the telephone is attached to the bracelet, and an incoming call is received, removal of the telephone to answer the call could automatically place the telephone in an off-hook status i.e. the call is answered merely by detaching the telephone without the need to press any keys on the telephone.

20 In a similar manner, the telephone can be placed in an on-hook condition by re-attaching the telephone to the bracelet.

Of course, other functions of the telephone could be controlled in a similar manner.

25

The re-attachment process is illustrated in Figures 4a to 4c. Figure 4a shows the bracelet part 300 as the telephone part 200 is introduced for re-attachment. The top edge of the upper portion 210 is provided with a ridge or projection as shown. There is a corresponding complementary recess in the
30 bracelet part 300. The upper portion 210 is inserted into the recess, and the central and lower portions (shown here as a single part for clarity) are pushed in the direction of the recess as indicated by the arrow.

The force applied by the user acts to overcome the biasing force which tends to maintain the upper portion in the relatively extended position.

5 Once the biasing force has been overcome, and the telephone assumes the configuration shown in Figure 4b, the user then moves the telephone 200 in a downwards direction towards the bracelet 300. In so doing, the aforementioned attachment means, forming part of the telephone, engage with the complementary part 350 on the bracelet.

10 The final position is as shown in Figure 4c. The telephone is secured in position by a combination of the effects of the projection and recess associated with the end of the upper portion 210, and the attachment system 350 associated with the central portion and the bracelet.

15 Again, the telephone is shown as having a generally flat profile for ease of understanding, but a curved, or other, profile could instead be adopted for the telephone.

20 In the light of the foregoing description, it will be clear to the skilled man that various modifications may be made within the scope of the invention.

The present invention includes any novel feature or combination of features disclosed herein either explicitly or any generalisation thereof irrespective of whether or not it relates to the claimed invention or mitigates any or all of the
25 problems addressed.

CLAIMS

1. A portable telephone assembly comprising first and second portions arranged to be mutually detachably interconnectable, the second portion being further arranged to be removably attachable to a user, the first portion comprising:

a body portion; and
an extendible portion movable between a relatively extended configuration and a relatively contracted configuration,

wherein the extendible portion is biased towards the relatively extended configuration, such that when the first portion is detached from the second portion, the extendible portion is urged towards the relatively extended configuration.

2. A telephone assembly as claimed in claim 1 wherein when the first and second parts are connected, the extendible portion adopts the relatively contracted configuration.

3. A telephone assembly as claimed in claim 1 or 2 wherein the extendible portion comprises an antenna.

4. A telephone assembly as claimed in any one of the preceding claims wherein the extendible portion comprises an earpiece.

5. A telephone assembly as claimed in any one of the preceding claims wherein the body portion comprises a display.

6. A telephone assembly as claimed in any one of the preceding claims wherein the extendible portion is supported on an elongate element.

7. A telephone assembly as claimed in claim 6 wherein the elongate element is a hollow tubular element.
8. A telephone assembly as claimed in claim 6 or 7 wherein the elongate element is disposed within the body portion when the extendible portion is in the relatively contracted configuration.
9. A telephone assembly as claimed in any one of the preceding claims wherein the relative configuration of the extendible portion controls a function of the telephone.
10. A telephone assembly as claimed in claim 9 wherein the relative configuration of the extendible portion controls the on-hook/off-hook status of the telephone.
11. A telephone assembly as claimed in claim 10 wherein removing the first portion from the second portion answers an incoming call.
12. A telephone assembly substantially as herein described and with particular reference to Figures 2 to 4 of the accompanying drawings.

ABSTRACT

A portable telephone assembly comprising first and second portions arranged to be mutually detachably interconnectable is disclosed. The second portion is
5 arranged to be removably attachable to a user. The first portion comprises a body portion and an extendible portion movable between a relatively extended configuration and a relatively contracted configuration. The extendible portion is biased towards the relatively extended configuration, such that when the first portion is detached from the second portion, the extendible portion is
10 urged towards the relatively extended configuration.

Figure 3a, 3b

BEST AVAILABLE COPY

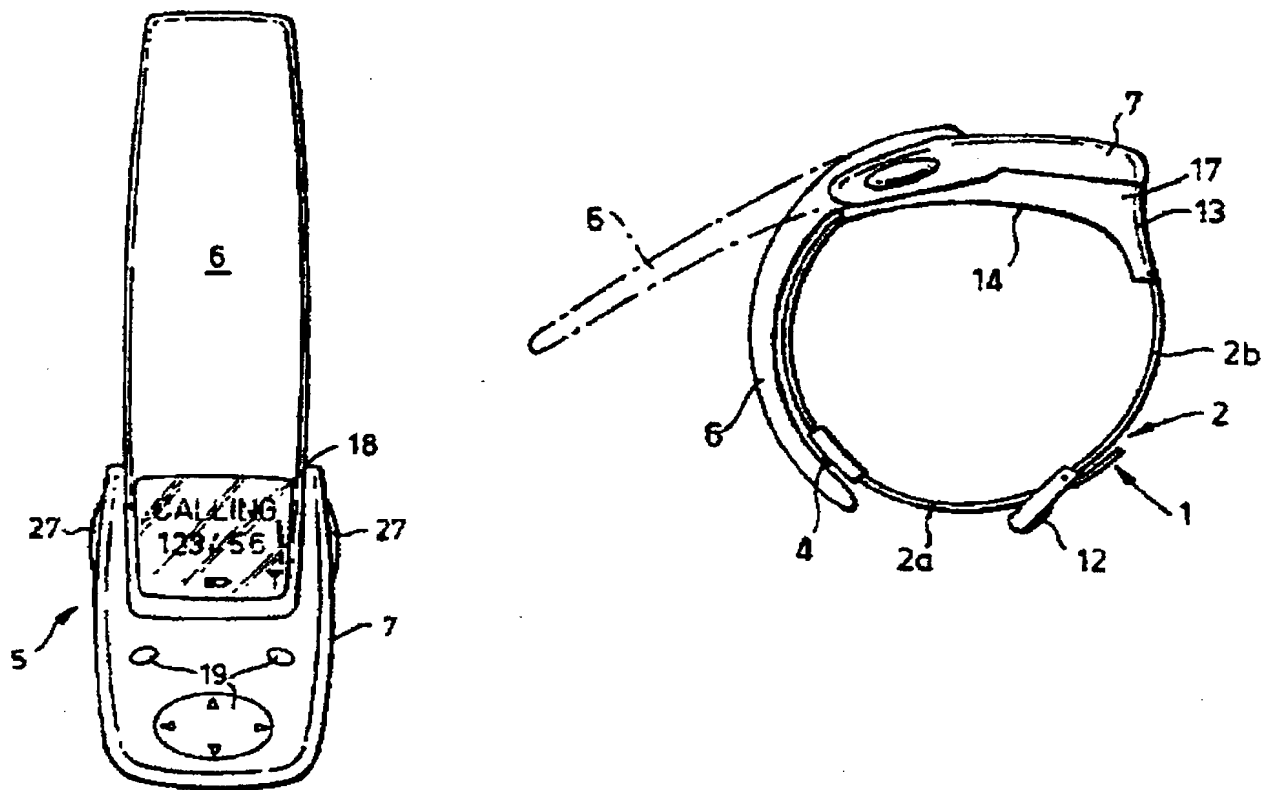


Figure 1
PRIOR ART

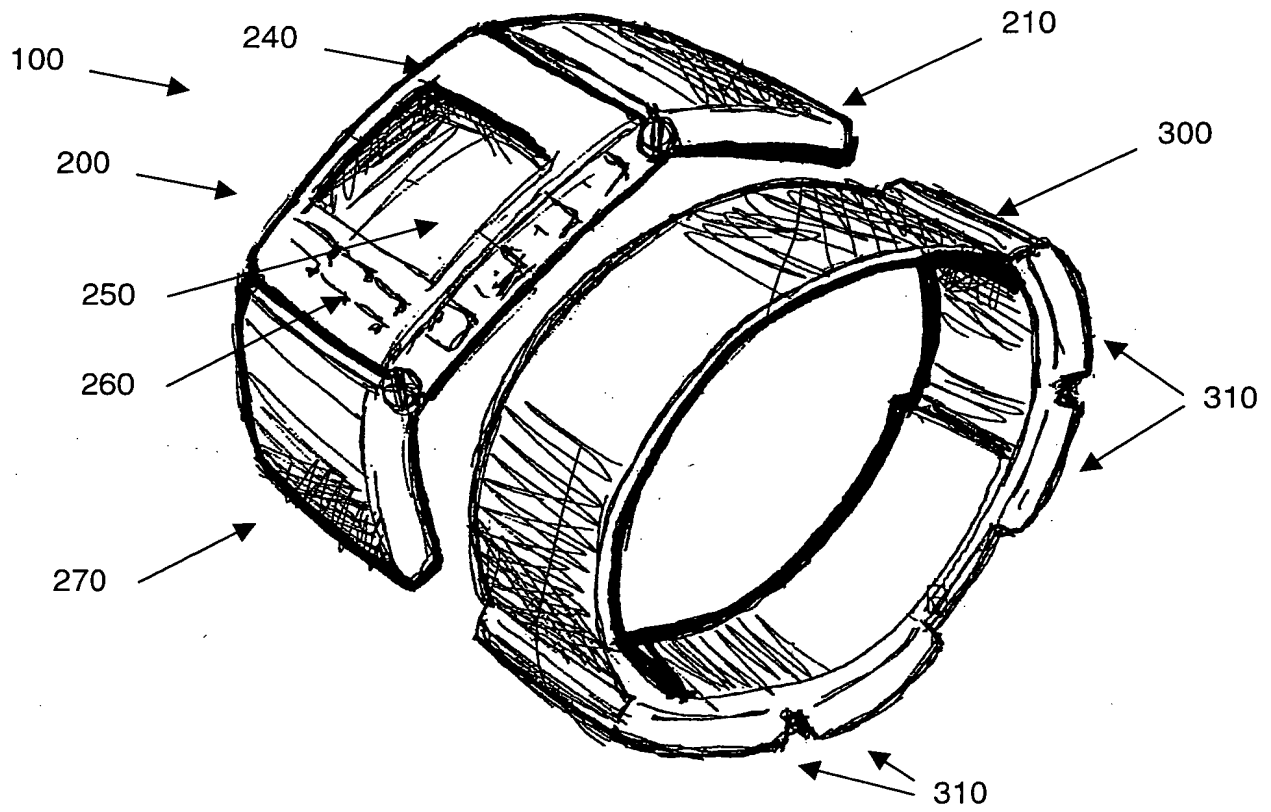


Figure 2

3/4

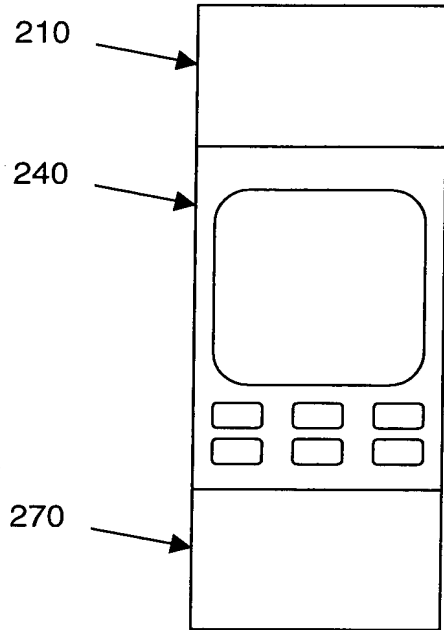


Figure 3a

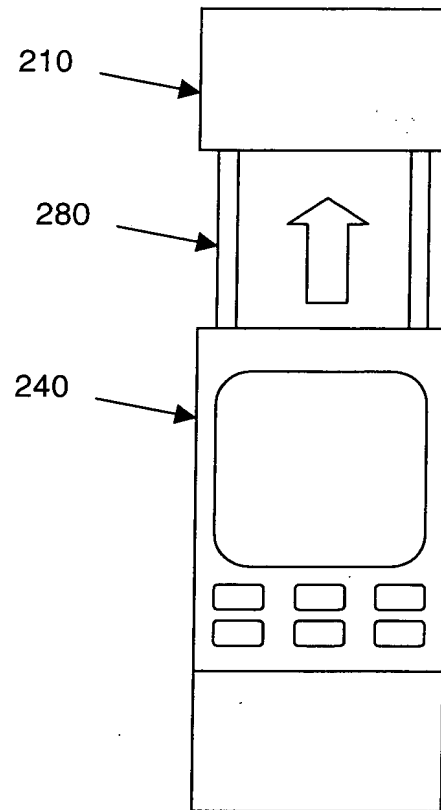


Figure 3b

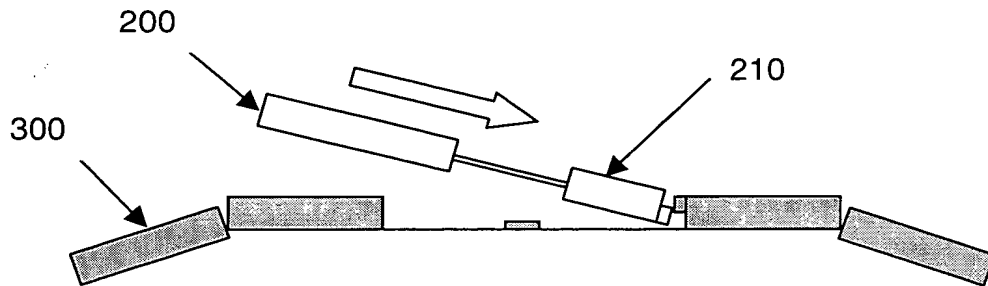


Figure 4a

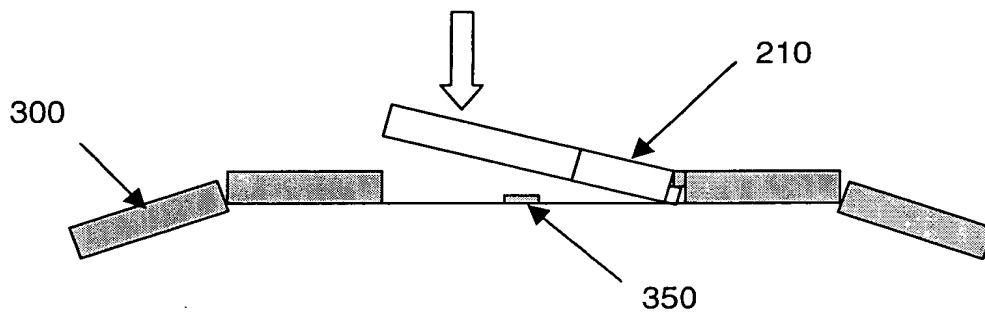


Figure 4b

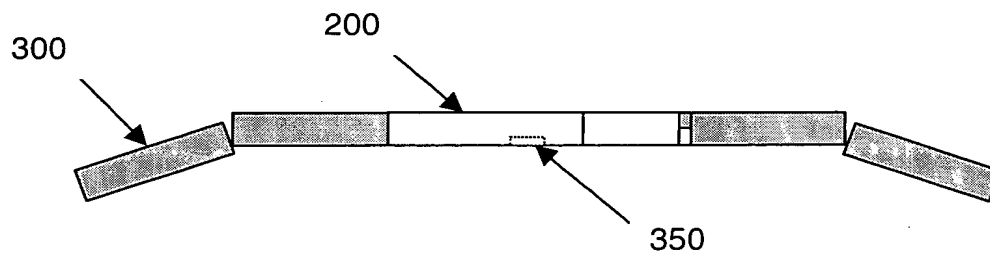


Figure 4c